


Enova 120 Induction Hob

FEHK 4805 ID MBK



- Matte Black Anodized Aesthetics
- Metal Control Knobs with Matte Black Finish
- Glass Ceramic Surface
- 5 Cooking Zones (2 vertical bridge zones)
- Pan Detection Sensor
- 9 Power Levels
- BOOST Rapid Preheating
- Child Safety lock
- Keep Warm Function

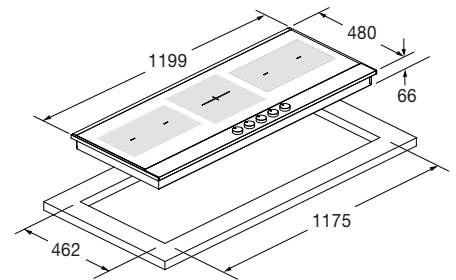

Features

The Enova cooktop is the perfect blend of cutting-edge technology and sophisticated design. Crafted from solid 15 mm satin-finished aluminum, it stands out for its elegant recessed knobs. Powered by innovative Quantum induction technology, it guarantees high performance, reduced energy consumption, and fast, precise cooking. The cooktop features five cooking zones, each controlled via dedicated knobs, including a high-power 28 cm zone and two zones with a bridge system ideal for larger cookware. Each zone offers adjustable power levels from 1 to 9, along with dedicated functions such as Keep Warm, Rapid Heat, and BOOST. Thanks to its refined design and advanced professional functions, the Enova cooktop is the ideal choice for those seeking an appliance that combines aesthetics and performance.



MATTE BLACK ANODIZED

FEHK 4805 ID MBK

EAN 8019801035342

INDUCTION HOB

GLASS CERAMIC INDUCTION HOBS



FEHK 4805 ID MBK				
Type	120 Induction Hob			
Aesthetics	Matte Black Anodized			
Surface	Glass Ceramic			
INDUCTION PERFORMANCE				
Induction features	Pan Detection System	Child Lock		
	Cooling System	Cooking Level Indicator		
Knobs for power adjustment	•			
Power levels	1-9			
Digital display indicating power level	•			
Melting function at 45°C	•			
Keep warm function at 70°C	•			
Simmering function at 95°C	•			
Booster / Rapid boil function for each zone	•			
Rapid heating	•			
Bridge function	•			
Rear Right	•			
COOKING ZONE FEATURES				
		Dimensions	Power	
5 Cooking Zones (2 Bridge Zones)				
1 Front Left	Octa Induction	220 x 180 mm	Level 9 - 2100W	Booster - 3700W
2 Rear Left	Octa Induction	220 x 180 mm	Level 9 - 2100W	Booster - 3700W
3 Central Dual Circuit	Round Induction	Ø 280 mm	Level 9 - 2600W	Booster - 5500W
4 Front Right	Octa Induction	220 x 180 mm	Level 9 - 2100W	Booster - 3700W
5 Posteriore Destro	Octa Induction	220 x 180 mm	Level 9 - 2100W	Booster - 3700W
DIMENSIONS				
Width		1199 mm		
Height (Without power cable)		66 mm		
Depth		480 mm		
Cut-out Width		1175 mm		
Cut-out Depth		462 mm		
ELECTRICAL SPECIFICATIONS				
Maximum Electrical Power (W)		11040W		
Conduit		•		